




Here illustrated with motor protection and cable (additional equipment)/
 Hier mit Motorschutz und Kabel (Zusatz-Ausrüstung) gezeigt.

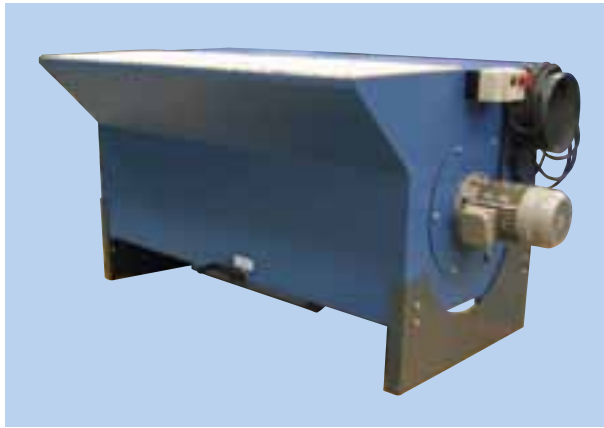

GB

Description UFPR 1000 - 3000

Universal extraction table with built-in fan

Construction

- Fan type VF, 3x400V, 2800 rpm.
- Filter cartridge G113
- Dust container beneath filter cartridge
- Manual Roto-cleaning
- Available in two depths: 1000 or 1250mm
- Table top is standard delivered with wooden sticks.
- Also available with steel ribs, stainless steel ribs or plastic ribs (POM)
- Height-adjustable legs

Application

- Can be used as glue table, griding table, polishing table, welding table or manual cutting table

D

Beschreibung UFPR 1000 - 3000

Universaler Absaugtisch mit eingebautem Ventilator

Konstruktion

- Ventilator Typ VF, 3x400V, 2800 Upm.
- Filterpatrone G113
- Staubschublade unterhalb Filterpatrone
- Manuelle Roto-Reinigung
- Erhältlich in zwei Tiefen: 1000 oder 1250mm
- Tischplatte wird Standard mit Holzstäben geliefert
- Auch erhältlich mit Stahlrippen, rostfreien Stahlrippen oder Kunststoff-Rippen (POM)
- Höhenverstellbare Beine


Anwendung

- Kann als Klebetisch, Schleiftisch, Poliertisch, Schweißisch oder manueller Scheidtisch verwendet werden



Easy to open

Side wall set and top hinged are easy to open.

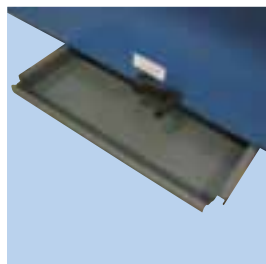

Dust container

Easy to open and empty.



Fan

Is standard delivered with fan type VF.



Wooden sticks


Table is standard delivered with wooden sticks.

Colour/Farbe: RAL 5007/7011 (structure/Struktur)

V. Aa. Gram A/S


LYSBJERGVEJ 10 • HAMMELEV • DK-6500 Vojens
 TELEPHONE +45 74 52 30 75 • TELEFAX +45 74 53 01 64
 E-MAIL: info@vaagram.dk • INTERNET: www.vaagram.com



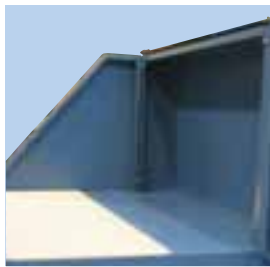

Einfach zu öffnen

Seitenwände und Decke sind einfach zu öffnen.



Staubschublade

Einfach zu öffnen und entleeren.



Ventilator

Wird Standard mit Ventilator Typ VF geliefert.



Holzstäbe

Tisch wird Standard mit Holzstäben geliefert.

GB

Standard filter cartridge type G113 is suitable for separation of dry dust and welding smoke.

Meets filter class M according to norm no. EN 60335-2-69 with extraction degree of at least 99.9%.

Filter cleaning takes place after end operation by manual Roto-cleaning.

D

Standard-Filterpatrone Typ G113 ist für Abscheidung von trockenem Staub und Schweißrauch geeignet.

Erfüllt Staubklasse M nach Norm Nr. EN 60335-2-99 mit einem durchschnittlichen Abscheidungsgrad von 99,9%.

Filterreinigung findet nach Betriebsende durch manueller Roto-Renigung statt.

GB

Extraction table type UFPR
- here illustrated above with:


- Steel ribs
- Backwall with extraction
- Side wall set with noise damping
- Top hinged with noise damping
- Lighting
- Motor protection

D

Absaugtisch Typ UFPR
- hier mit Zusatz-Ausrüstung gezeigt:

- Stahlrippen
- Hinterwand mit Absaugung
- Seitenwandsatz mit Isolierung
- Decke mit Isolierung
- Beleuchtung
- Motorschutz



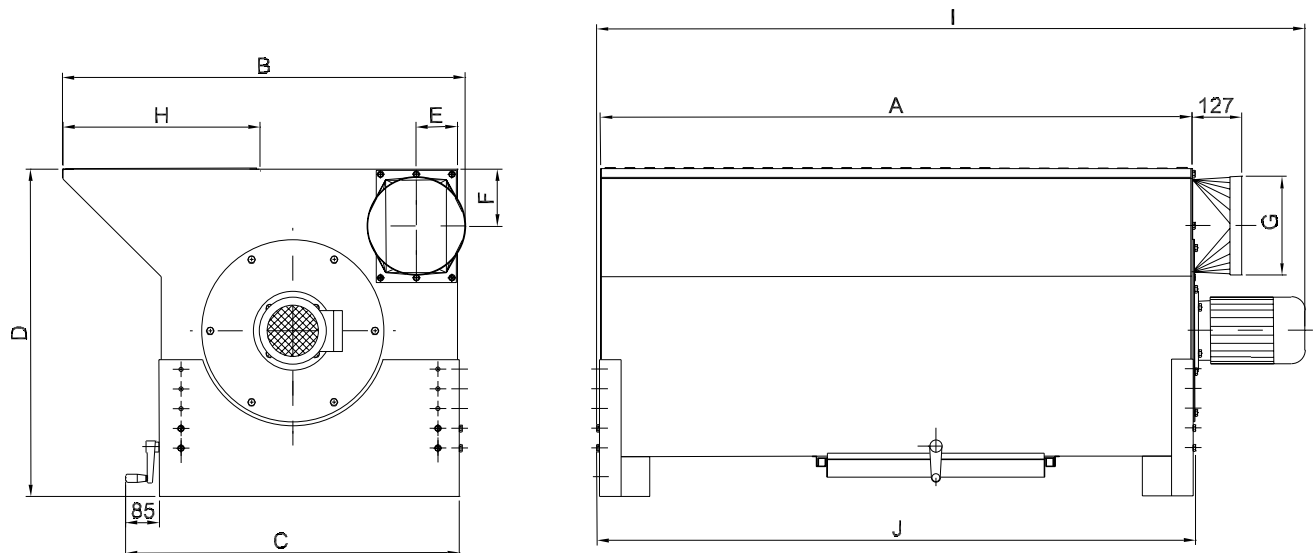

Type	Order no.	A	B	C	D*	E	F	G	H	I	J
UFPR 1000	02 600 500	1000	1022	847	830 - 980	105	145	ø250	485	1271	1018
UFPR 1500	02 605 500	1500	1022	847	830 - 980	105	145	ø250	485	1771	1518
UFPR 2000	02 610 000	2000	1022	847	830 - 980	105	145	ø250	485	2326	2018
UFPR 2500	02 615 000	2500	1022	847	830 - 980	105	145	ø250	485	3081	2518
UFPR 3000	02 620 000	3000	1022	847	830 - 980	105	145	ø250	485	3636	3018
UFPR 1000	02 625 000	1000	1272	1097	830 - 980	105	145	ø250	735	1271	1018
UFPR 1500	02 630 000	1500	1272	1097	830 - 980	105	145	ø250	735	1771	1518
UFPR 2000	02 635 000	2000	1272	1097	830 - 980	105	145	ø250	735	2326	2018
UFPR 2500	02 640 000	2500	1272	1097	830 - 980	105	145	ø250	735	3081	2518
UFPR 3000	02 645 000	3000	1272	1097	830 - 980	105	145	ø250	735	3636	3018

*Height-adjustable

Type	Order no.	Fan	[kW]	Extraction dimension	Filter area [m²]	Air volume [m³/h]	Weight [kg]
UFPR 1000	02 600 500	VF 1500	1.1	450 x 1000	1 x 8	800	165
UFPR 1500	02 605 500	VF 1500	1.1	450 x 1500	1 x 8	1200	195
UFPR 2000	02 610 000	VF 2500	2.2	450 x 2000	2 x 8	1600	220
UFPR 2500	02 615 000	1 x VF 2500 1 x VF 2000	2.2 1.5	450 x 2500	2 x 8	2000	290
UFPR 3000	02 620 000	2 x VF 2500	2.2	450 x 3000	2 x 8	2400	325
UFPR 1000	02 625 000	VF 1500	1.1	700 x 1000	1 x 8	1250	200
UFPR 1500	02 630 000	VF 1500	1.1	700 x 1500	1 x 8	1900	230
UFPR 2000	02 635 000	VF 2500	2.2	700 x 2000	2 x 8	2550	255
UFPR 2500	02 640 000	1 x VF 2500 1 x VF 2000	2.2 1.5	700 x 2500	2 x 8	3150	325
UFPR 3000	02 645 000	2 x VF 2500	2.2	700 x 3000	2 x 8	3750	360

Filter cartridge type Staubmaster G111 (ø480 x 500mm, 8m², FC / 08 116 250)

GB

May max. be stressed with 150 kg/m on the rib surface. Can against additional payment be strengthened to 300 kg/m (02 668 000).

D

Kann mit Max. 150 kg/m auf der Rippenoberfläche belastet werden. Kann gegen Zulage bis zu 300 kg/m (02 668 000) verstärkt werden.

V. Aa. Gram A/S


LYSBJERGVEJ 10 • HAMMELEV • DK-6500 Vojens

TELEPHONE +45 74 52 30 75 • TELEFAX +45 74 53 01 64


E-MAIL: info@vaagram.dk • INTERNET: www.vaagram.com




Backwall with/without extraction for UFPR 1000/1250:

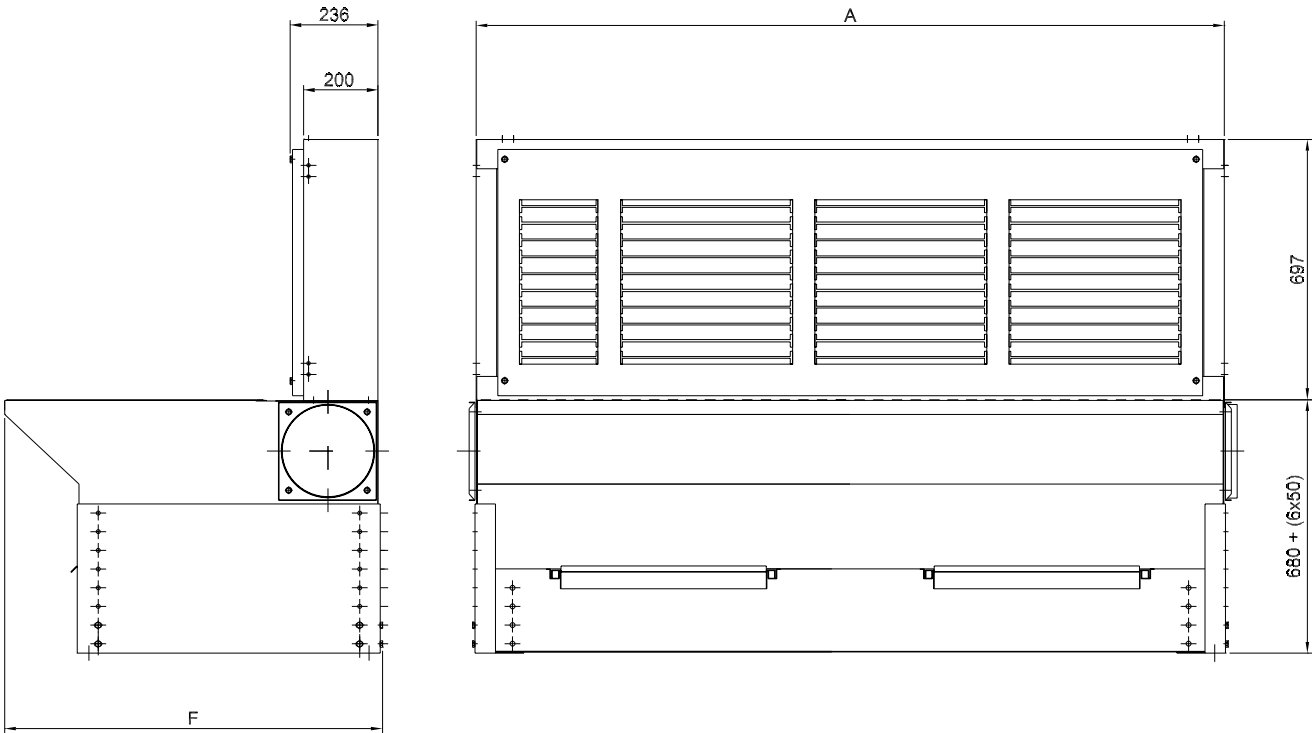


Product	Order no.	A	B	C	D	E	F
Backwall with extraction for UFPR 1000	02 667 000	1004	998	998	790	738	1104
Backwall with extraction for UFPR 1500	02 667 100	1504	1498	998	790	738	1104
Backwall with extraction for UFPR 2000	02 667 200	2004	1898	998	790	738	1104
Backwall with extraction for UFPR 2500	02 667 300	2504	2498	998	790	738	1104
Backwall with extraction for UFPR 3000	02 667 400	3004	2998	998	790	738	1104
Backwall without extraction for UFPR 1000	02 666 000	1004	998	1248	1040	988	1354
Backwall without extraction for UFPR 1500	02 666 100	1504	1498	1248	1040	988	1354
Backwall without extraction for UFPR 2000	02 666 200	2004	1898	1248	1040	988	1354
Backwall without extraction for UFPR 2500	02 666 300	2504	2498	1248	1040	988	1354
Backwall without extraction for UFPR 3000	02 666 400	3004	2998	1248	1040	988	1354

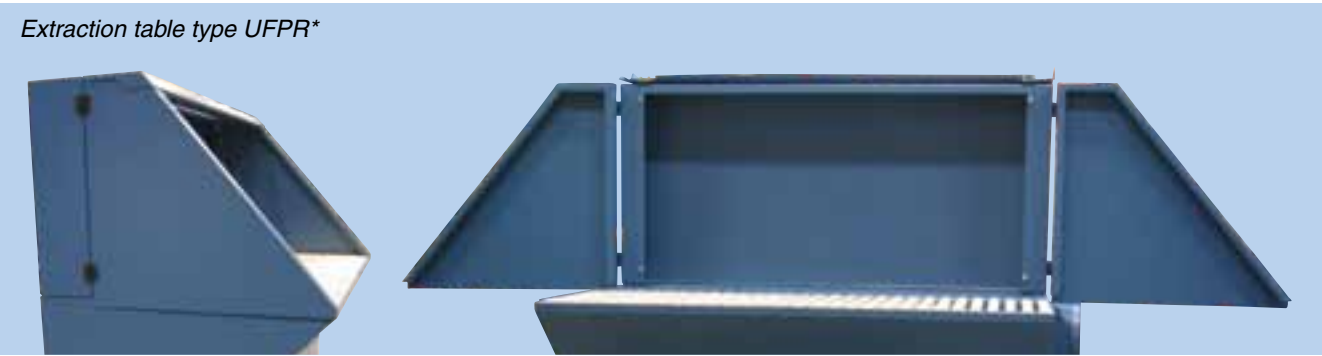

* Here with backwall without extraction as well as side wall set and hinged top without noise damping.

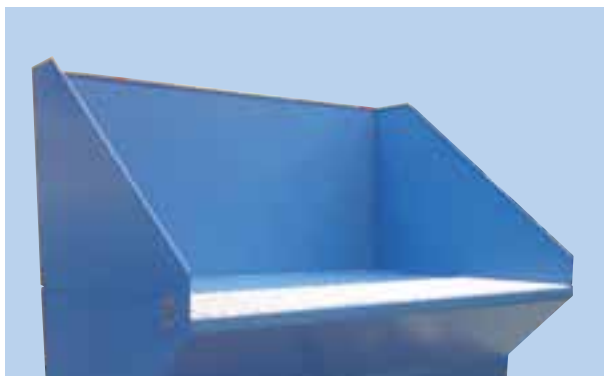

Light backwall and side set for UFPR 1000/1250:

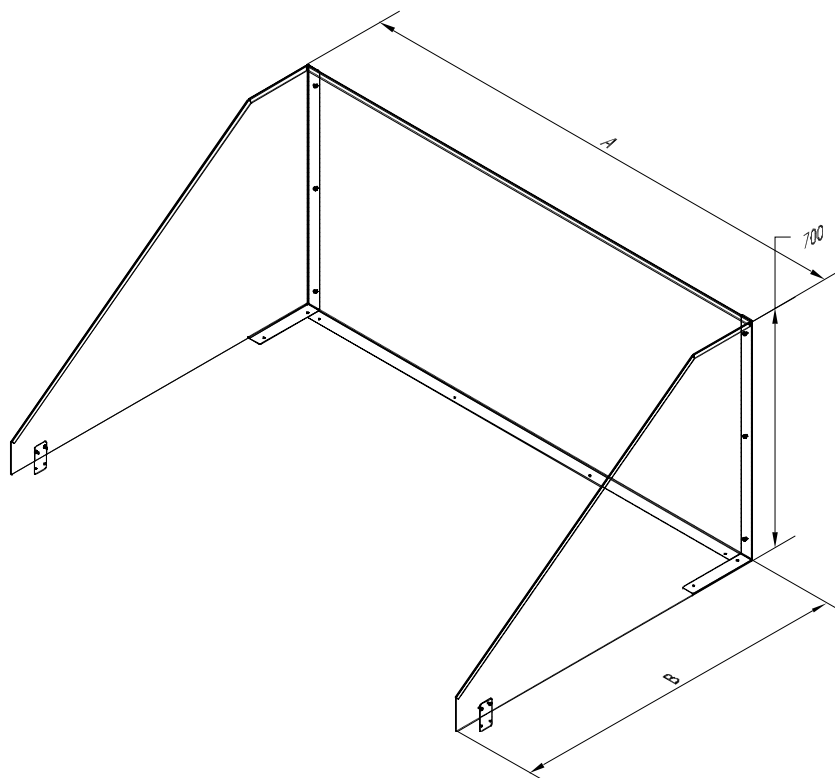

Product	Order no.	A [mm]	B [mm]
Light backwall and side set for UFPR 1000/1000*	02 669 000	1000	1000
Light backwall and side set for UFPR 1500/1000*	02 669 200	1500	1000
Light backwall and side set for UFPR 2000/1000*	02 669 400	2000	1000
Light backwall and side set for UFPR 2500/1000*	02 669 600	2500	1000
Light backwall and side set for UFPR 3000/1000*	02 669 800	3000	1000
Light backwall and side set for UFPR 1000/1250*	02 670 000	1000	1250
Light backwall and side set for UFPR 1500/1250*	02 670 200	1500	1250
Light backwall and side set for UFPR 2000/1250*	02 670 400	2000	1250
Light backwall and side set for UFPR 2500/1250*	02 670 600	2500	1250
Light backwall and side set for UFPR 3000/1250*	02 670 800	3000	1250
Mounting of light backwall and side set	02 671 000	-	-


* Delivered not mounted

V. Aa. Gram A/S

LYSBJERGVEJ 10 • HAMMELEV • DK-6500 Vojens
TELEPHONE +45 74 52 30 75 • TELEFAX +45 74 53 01 64
E-MAIL: info@vaagram.dk • INTERNET: www.vaagram.com




Side wall set and hinged top for UFPR 1000:

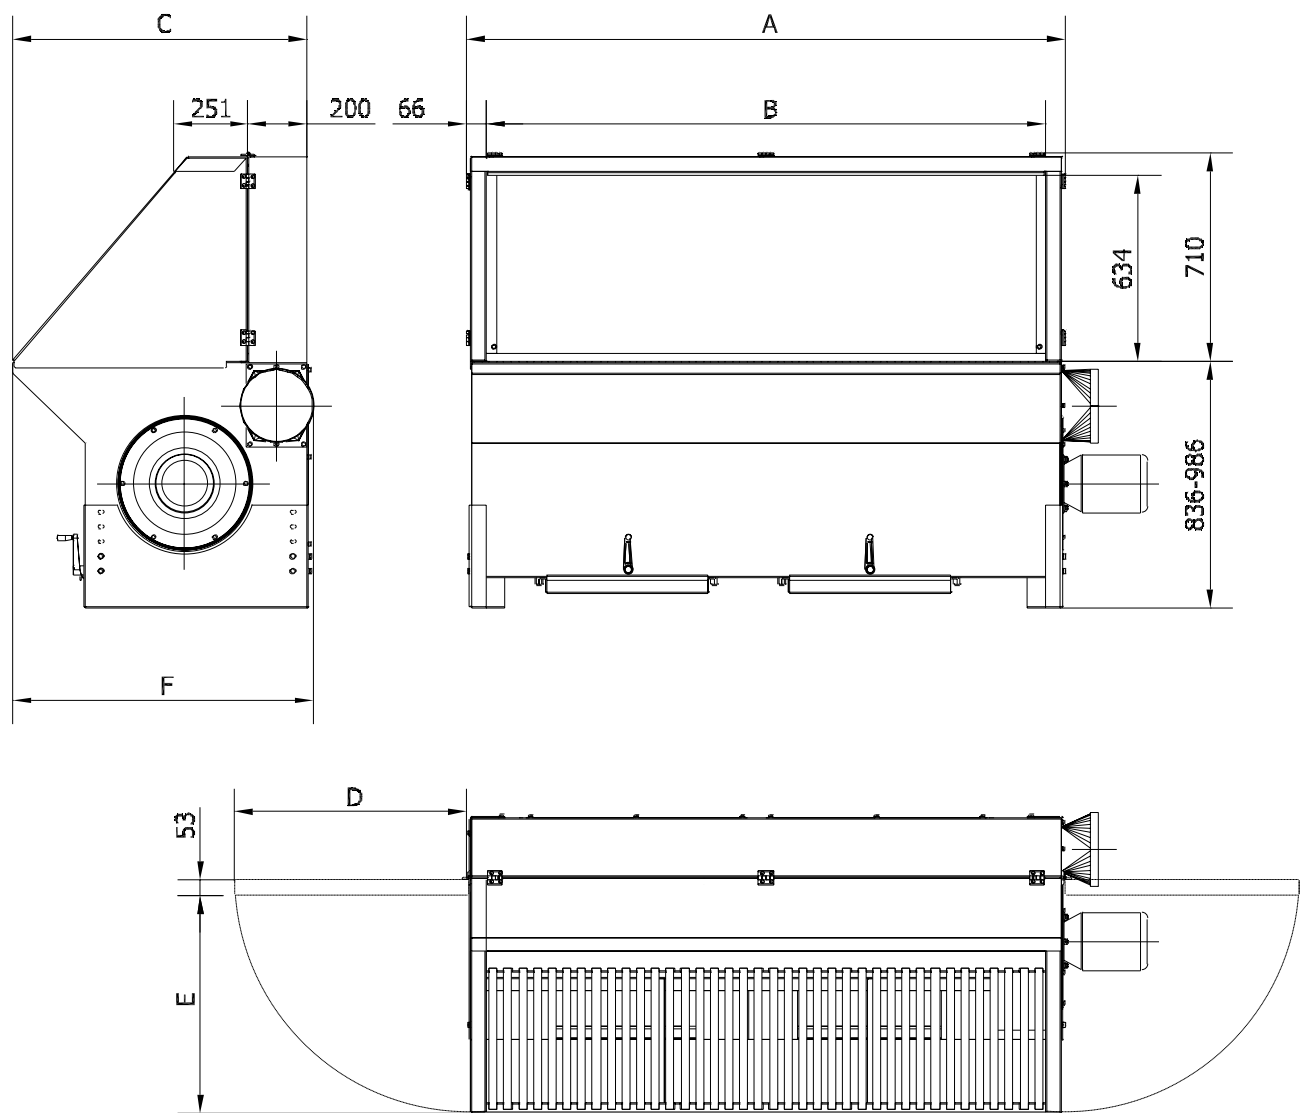

Product	Order no.	A	B	C	D	E	F
Side wall set for UFPR 1000 without noise damping*	02 663 000	-	-	-	-	-	1020
Side wall set for UFPR 1000 with noise damping*	02 663 100	-	-	-	-	-	1020
Top hinged for UFPR 1000 without noise damping	02 664 000	1030	998	998	790	738	1020
Top hinged for UFPR 1500 without noise damping	02 664 100	1530	1498	998	790	738	1020
Top hinged for UFPR 2000 without noise damping	02 664 200	2030	1898	998	790	738	1020
Top hinged for UFPR 2500 without noise damping	02 664 300	2530	2498	998	790	738	1020
Top hinged for UFPR 3000 without noise damping	02 664 400	3030	2998	998	790	738	1020
Top hinged for UFPR 1000 with noise damping	02 665 000	1030	998	998	790	738	1020
Top hinged for UFPR 1500 with noise damping	02 665 100	1530	1498	998	790	738	1020
Top hinged for UFPR 2000 with noise damping	02 665 200	2030	1898	998	790	738	1020
Top hinged for UFPR 2500 with noise damping	02 665 300	2530	2498	998	790	738	1020
Top hinged for UFPR 3000 with noise damping	02 665 400	3030	2998	998	790	738	1020


Recht auf Änderungen bleibt vorbehalten. / Data is subject to alterations.
Rev. 08-14

Side wall set and hinged top for UFPR 1250:

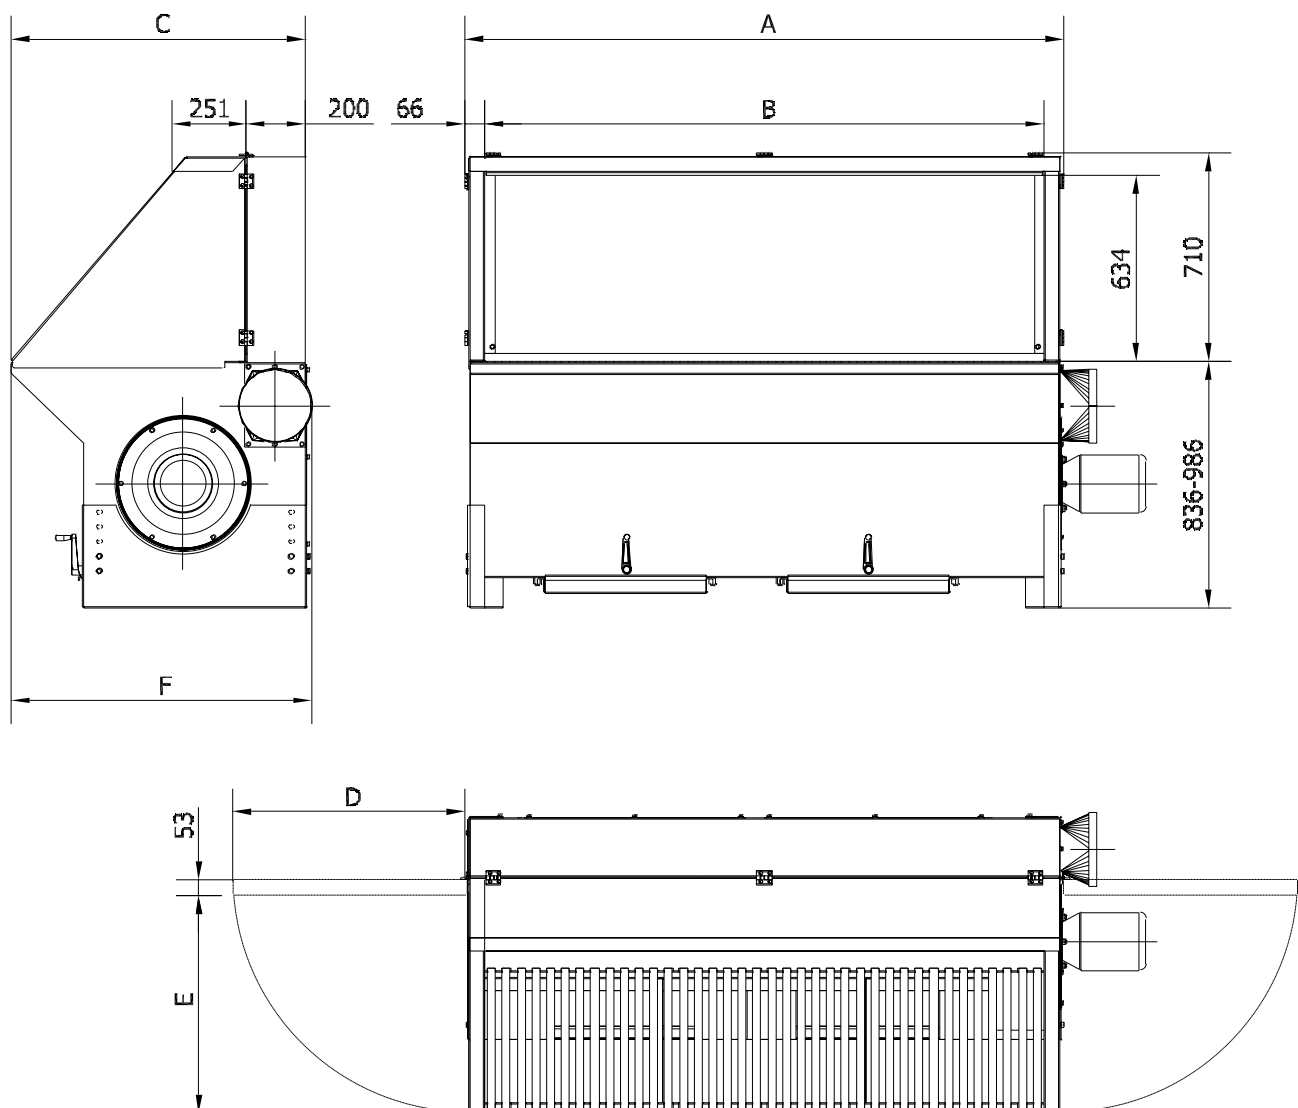

Product	Order no.	A	B	C	D	E	F
Side wall set for UFPR 1250 without noise damping*	02 633 500	-	-	-	-	-	1270
Side wall set for UFPR 1250 with noise damping*	02 663 600	-	-	-	-	-	1270
Top hinged for UFPR 1000 without noise damping	02 664 050	1030	998	1248	1040	988	1270
Top hinged for UFPR 1500 without noise damping	02 664 150	1530	1498	1248	1040	988	1270
Top hinged for UFPR 2000 without noise damping	02 664 250	2030	1898	1248	1040	988	1270
Top hinged for UFPR 2500 without noise damping	02 664 350	2530	2498	1248	1040	988	1270
Top hinged for UFPR 3000 without noise damping	02 664 450	3030	2998	1248	1040	988	1270
Top hinged for UFPR 1000 with noise damping	02 665 050	1030	998	1248	1040	988	1270
Top hinged for UFPR 1500 with noise damping	02 665 150	1530	1498	1248	1040	988	1270
Top hinged for UFPR 2000 with noise damping	02 665 250	2030	1898	1248	1040	988	1270
Top hinged for UFPR 2500 with noise damping	02 665 350	2530	2498	1248	1040	988	1270
Top hinged for UFPR 3000 with noise damping	02 665 450	3030	2998	1248	1040	988	1270


Additional equipment for extraction table type UFPR:

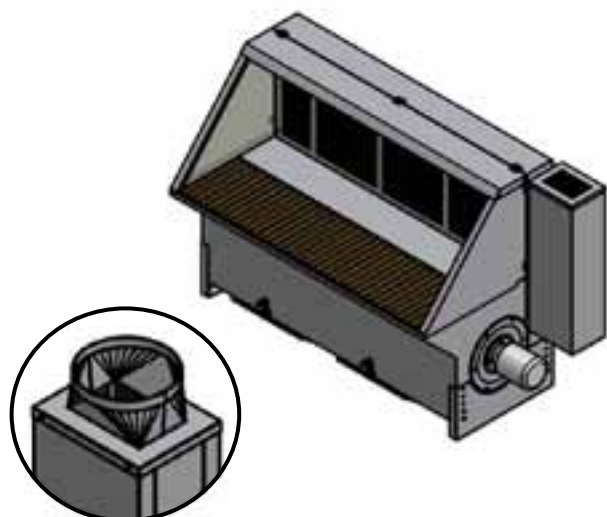

Order no.	Product*	Fan
02 610 200**	Channel silencer for UFPR	VF 2000 VF 2500
02 610 250	Additional payment for outlet connection on channel silencer	-
02 610 500	Additional payment for side wall incl. distance piece. Side opening is reduced by 100mm in connection with mounted silencer - left side	-
02 610 550	Additional payment for side wall incl. distance piece. Side opening is reduced by 100mm in connection with mounted silencer - right side	-

* Recirculation - not permitted in Denmark

** Hinged standard side walls will only open 45°. If you require an opening up to 90°, select 02 600 500 or 02 600 550.

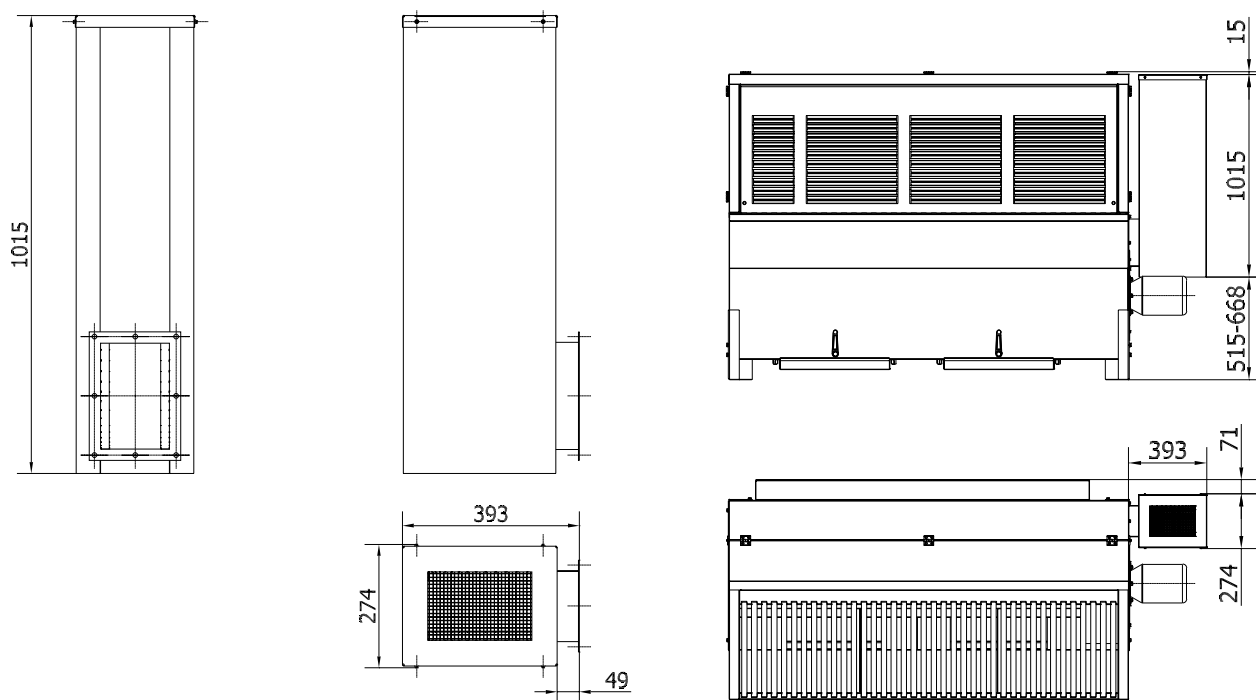

Order no.	Description
02 600 100	Additional payment for perforated table top for existing wooden sticks/steel ribs. Table depth: 1000mm
02 625 100	Additional payment for perforated table top for existing wooden sticks/steel ribs. Table depth: 1250mm
02 668 715	Mounting plate without holes for mounting of vice on UFPR 1000 - right or left side
02 668 720	Mounting plate without holes for mounting of vice on UFPR 1250 - right or left side
02 668 000	Strengthening of extraction table type UF from max. stress of 150kg/m on rib surface to 300kg/m.
02 600 040	Wheel set of 4 pcs. turnable wheels ø100mm with brakes (max. load on alle 4 wheels: 225kg)
02 600 050	Wheel set of 4 pcs. turnable wheels ø100mm with brakes (max. load on alle 4 wheels: 410kg)
09 700 000	Fluorescent lighting fitting 1x18 W (excl. switch)
09 701 000	Fluorescent lighting fitting 1x36 W (excl. switch)
09 703 000	Additional payment for fluorescent lighting fitting mounting in hinged top
09 703 100	Additional payment for mounting of 5m cable and 230VAC-plug
09 703 200	Additional payment for mounting of 5m cable and 230VAC-plug (Schuko)